

Technical Data Sheet

Induction Heater IH 125




Compact induction heater for bearings weighing up to 150 kg

The compact simatherm induction heater offers a working space of 142,5 x 201 mm for heating small to medium-sized rolling bearings and other ring-shaped metal parts. With the automatic time and temperature control, rolling bearings can be heated up to the 110 °C specified by manufacturers, and other ring-shaped metal parts up to 250 °C.

- Supplied with three yokes as standard
- Very compact design - including the yokes only 35 kg in weight
- Extendable bearing support for safe support of workpieces with large diameters
- Remote control via mobile devices via Bluetooth possible (only possible with app „World of Maintenance“!)
- 2 probe technology (Delta-T) to avoid mechanical stresses in the workpiece

Description IH 125

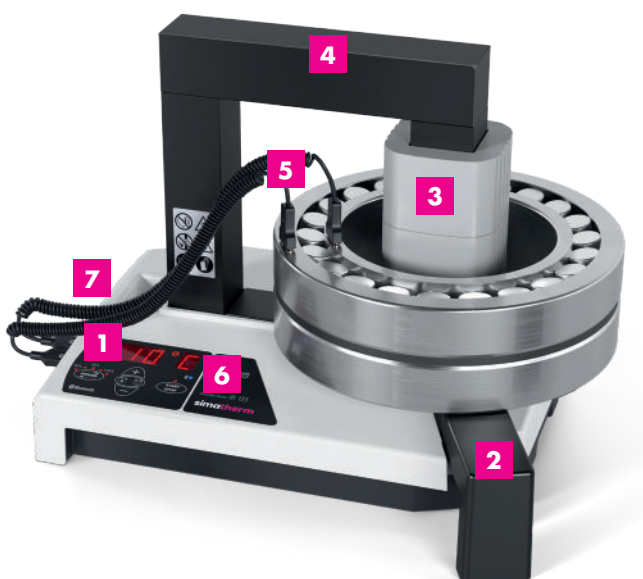

- 1 Clear user interface with LED display
- 2 Extendable bearing support
- 3 Induction coil outside the housing, shortens heating times and reduces energy intake
- 4 Support yoke (standard with 3 standard yokes)
- 5 Magnetic temperature probes; monitoring of bearing temperature on inner and outer ring and protection against bearing overheating
- 6 Blue LED indicates Bluetooth connection
- 7 Main switch

Technical Data Sheet

Induction Heater IH 125

Technical Data IH 125

Designation	Heater for small to medium workpieces
Voltage V / Hz / power	120 V / 50 – 60 Hz / 2,2 kVA 230 V / 50 – 60 Hz / 3,7 kVA 400 V / 50 – 60 Hz / 6,4 kVA
Workpiece - Maximum weight - Bore diameter	150 kg 20 – 400 mm
Temperature control - Range - Magnetic probe - Accuracy (electronic)	20 – 250 °C (68 – 482 °F) Type K ± 3 °C
Time control - Range - Accuracy	0 – 60 minutes ± 0,01 seconds
Maximum temperature (approx.)	250 °C (482 °F)
Thermometer mode	yes
Bearing temperature mode	yes
Power reduction	8 levels / 10-20-30-40-50-60-80-100%
Automatic demagnetization / residual magnetism	yes / < 2A/cm
Suitable for heating sealed bearings	yes
Suitable for heating pre-greased bearings	yes
Error guide codes	yes
Thermal overload protection	yes
Maximum magnetic flux	1.5 T
Control panel	keyboard with LED-display
Connectivity	supports Bluetooth® Low Energy 5.0 standard
Size of the operating area (W x H)	142,5 x 201 mm
Coil diameter	115 mm
Measurements (L x W x H)	425 x 300 x 355 mm
Overall weight including yokes	35 kg
Number of standard yokes	3
Standard yokes	55 x 55 x 275 mm for bearings with a bore diameter ≥ 60 mm 28 x 28 x 275 mm for bearings with a bore diameter ≥ 40 mm 14 x 14 x 275 mm for bearings with a bore diameter ≥ 20 mm
Core cross section	55 x 55 mm
Yoke storage	integrated
Housing material - Bottom - Cover	Aluminium Glass fiber reinforced thermoset



Features and dimensions IH 125

- Can heat a 28 kg bearing from 20 °C to 110 °C in less than 3,5 minutes, saving time and energy
- 8-stage power intake in combination with smaller yokes, allows smaller bearings to be heated safely and quickly with less energy
- Temperature pre-selection to 110 °C to protect the bearings from overheating
- Automatic demagnetization
- 3 years manufacturer's warranty